

# DEFINING RUGGED

EXCEPTIONAL ENGINEERING | ROCK SOLID | EXTENSIVE TESTING

## STANDARD-ADJUSTABLE UPPER POLES


Placement	Height Adjustability	Weight	Height	Width	Depth
Inserts into: - 7" Lower Tube (Item No. DS-LOWER-7) - 9" Lower Tube (Item No. DS-LOWER-9) - 13" Lower Tube (Item No. DS-LOWER-13) - <b>Vehicle Base</b> that has a welded lower tube	Allows 0.38" - 5.76" adjustment above lip of <i>Lower Tube</i>	2.6 lbs	9.25"	3.5"	5.8"

### Features:

- Heavy gauge steel construction for long-term durability
- Black powdercoat finish for maximum corrosion resistance
- Any **Motion Attachment** can be mounted on top of the *Upper Pole*
- Wrench is needed for left/right rotational adjustments and height adjustments

**Key Dimension - Determines How Far Equipment Extends Away From Pole**

Item No. **DS-UPPER**

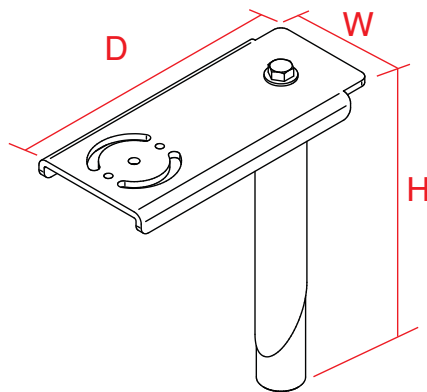

3001 Borham Ave. | Stevens Point, WI 54481, USA  
Phone: 715.344-3482 | Toll-free: 800.487-9220 | Fax: 715.344-5209  
Email: [gamberj@gamberjohnson.com](mailto:gamberj@gamberjohnson.com) | Website: [www.gamberjohnson.com](http://www.gamberjohnson.com)

This document, including images, may not be reproduced partly or fully without the expressed written consent of Gamber-Johnson's Marketing Department. © Copyright 2012 Gamber-Johnson LLC